


PoE Accessory



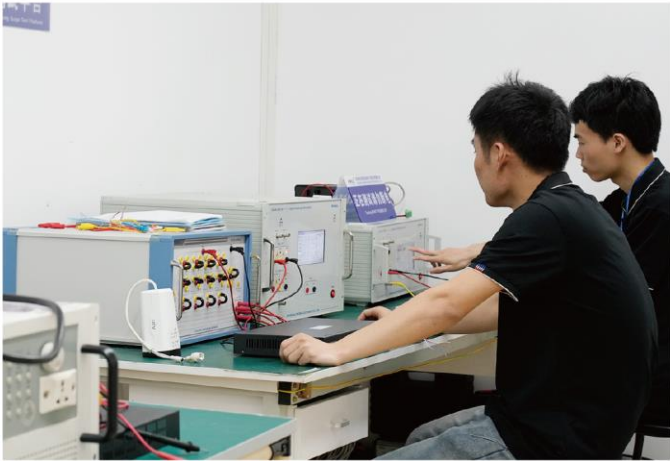

R&D Advantage

We have a large technical service team composed of 40 engineers, can provide OEM/ODM product customization, software function customization and other technical support. We are able to provide remote technical operation support within 24 hours, after-sales technical support such as real-time technical issues, video conferences, etc.



>60

SKUs developed per year




>40

R&D personnel



>10 years

Development experience

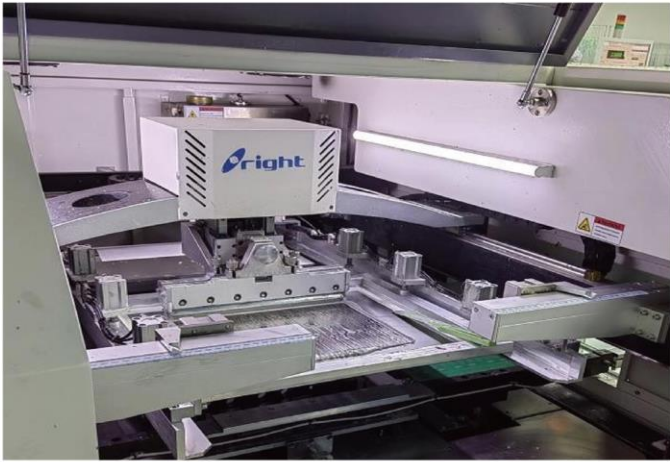

Factory View

HRUI has achieved significant manufacturing environment advantage and a complete industrial layout after years of hard work and precipitation.



2013

Company established



≥300

Employees



12000m²


Industrial Plant



≥250K pcs

Production per Month

Why choose HRUI ?



Product quality and reliability

With Advanced Manufacturing Processes and quality testing all in Shenzhen, HRUI is being the approved vendor supplying switches to many OEM/ODM/JDM brand customers around the world.



Factory Capability and Capacity

ISO9001/14001/45001 Manufacturing Lines; Capacity of over 2 Million pcs of switches per year. Qualified by lots of world famous brand customers, and audited by CE/Anatel/UL.



Networking Product Development





>40 R&D personnel, >60 Switch SKUs developed per year, >10 years of experiences in developing networking switches and firmwares.




Can Pass Regulatory Certificates

Capable of getting major regulatory certificates (CE, FCC,UL, CB, KC, ANATEL, etc.)

PoE Injector

				
Model	HR900-AFG-N301	HR900-BTG-N601	HR900-BTG-N901	HR-BTTG-N901
Port	1*GE PoE Out + 1* GE In	1*GE PoE Out + 1* GE In	1*GE PoE Out + 1* GE In	1*10G PoE Out + 1* 10GE In
PoE Power	30W	60W	90W	90W
PoE Standard	IEEE802.3 af/at	IEEE802.3 af/at/bt	IEEE802.3 af/at/bt	IEEE802.3 af/at/bt
Power Input	AC100-240V	AC100-240V	AC100-240V	AC100-240V
Pins	12+/36-	12-/36+; 45+/78-	12-/36+; 45+/78-	12-/36+; 45+/78-
Housing	Plastic	Metal	Metal	Metal
Wall Mounting	√	√	√	√
Surge Protection	/	6KV	6KV	6KV
ESD	/	8KV	8KV	8KV
Working Temperature	-20~50℃	-20~50℃	-20~50℃	-20~50℃
Product Size(mm)	142*55*40mm	187*95*40mm	187*95*40mm	187*95*40mm

250Meter PoE Extender

			
Model	HR-AFR-21	HR-AFGR-21	HR-PE08-SV+/ IPC+
Port	2*FE PoE Out + 1* FE PoE In	2*GE PoE Out + 1* GE PoE In	1*FE PoE Out + 1* FE PoE In
PoE Power	30W	30W	30W
PoE Standard	IEEE802.3 af/at	IEEE802.3 af/at	IEEE802.3 af/at
Power Input	PoE 30W	PoE 30W	DC Input
Bandwidth	0.6Gbps	6Gbps	0.4Gbps
Packet Forward Rate	0.44Mpps	4.46Mpps	0.297Mpps
MAC Address Table	2K	2K	2K
Product Size(mm)	49*100*25mm	49*100*25mm	49*100*25mm

Media Converter



Model	HR100W-FE-25-TR	HR100W-GE-3-TR	HR100W-GE-25-TR
Fiber Connector	SC	SC	SC
Ethernet Port	10/100 Mbps RJ45	10/100/1000 Mbps RJ45	10/100/1000 Mbps RJ45
Fiber Transmission Distance	25KM	3KM	25KM
Fiber Mode	Single-Mode	Single-Mode	Single-Mode
Fiber Number	Single Fiber	Single Fiber	Single Fiber
Wavelength	TX: 1310 nm, RX: 1550 nm	TX: 1310 nm, RX: 1550 nm	TX: 1310 nm, RX: 1550 nm
Power	DC5V2A	DC5V2A	DC5V2A
Product Size(mm)	94*70*26mm	94*70*26mm	94*70*26mm